



## Key Feature

- 2 MP HD camera with high quality image
- 120 ° wide angle of view
- 3.5-inch colorful LCD screen with 480 × 320 resolution
- Unlocks by cards and pin-codes
- Supports configuration via Web remotely


## Specification

System parameters	
Operation system	Embedded Linux operation system
Flash	4 GB
RAM	512 MB
CPU	Embedded processor
Display parameters	
Size	3.5-inch
Operation method	Display screen, physical buttons
Type	Colorful LCD
Resolution	480 × 320
Video parameters	
Supplement light	Low illumination, IR supplement lights
Video compression standard	H.264
Lens	2 MP HD camera
FOV	Horizontal: 70° , Vertical: 121° , Diagonal: 131°
WDR	Support
Pixel	Main stream: 1920×1080p ,720p Sub stream: 640×480

Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U, G.711 A
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Fingerprint capacity	/
User capacity	10000
Face capacity	/
Linked indoor station	500
Event capacity	/
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	6
Network interface	1 10/100/1000 Mbps self-adaptive, RJ45 Analog Interface
TAMPER	1

Exit button	2
RS-485	2
USB	0
Wiegand	1
TF card	/
Alarm output	2
Lock control	2
Door contact input	2
Power interface	1
<b>General</b>	
Button	/
Installation	Flush mounting
Indicator	/
Weight	Without package: 1.05 kg With package: 2.166 kg
Protective level	IP 65
Power supply method	12 VDC
Working temperature	-40 ° C to +55 ° C (-40 ° F to +135 ° F)
Working humidity	10% to 95%
Dimensions	418 mm × 145 mm × 59.7 mm (16.46" × 5.71" × 2.35")
Battery	/
Power supply	≤ 10 W
Application environment	Outdoor

**Dimension**

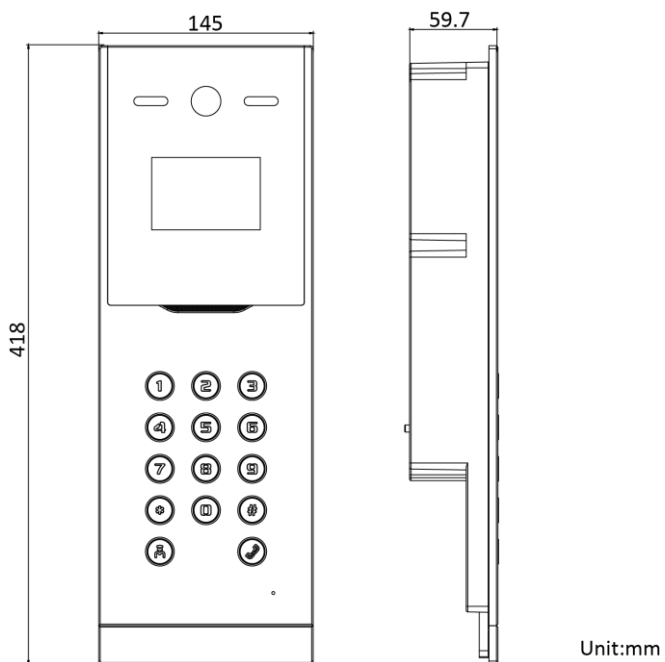

**Available Model**

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**

T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**

T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**

T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**

T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**

T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**

T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**

T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**

T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**

T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**

T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**

T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**

Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**

T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**

T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**

T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**

T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**

T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**

T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**

T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**

T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**

T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**

T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**

T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**

T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**

sales.colombia@hikvision.com